


加工一般公差	孔與孔中心距公差	表面粗糙度 4Rz=5
<6	±0.1	<M12 ±0.3
>6	±0.2	>M12 ±0.5
>30	±0.3	圓孔, 無標公差
>120	±0.5	圓孔, 無標公差
>315	±0.8	圓孔, 無標公差
>1000	±1.2	圓孔, 無標公差
Work table diameter	Work table diameter	Work table diameter
Height of table	Height of table	Height of table
Center bore diameter	Center bore diameter	Center bore diameter
Division Number	Division Number	Division Number
Rotation torque	Rotation torque	Rotation torque
Allowable Loading capacity	Allowable Loading capacity	Allowable Loading capacity
Allowable inertia	Allowable inertia	Allowable inertia
Max. clamping torque	Max. clamping torque	Max. clamping torque
Drive pressure	Drive pressure	Drive pressure
Division accuracy	Division accuracy	Division accuracy
Repeatability	Repeatability	Repeatability
Runout of surface	Runout of surface	Runout of surface
Parallelism between top & under table	Parallelism between top & under table	Parallelism between top & under table
Flatness of surface	Flatness of surface	Flatness of surface
Rotation	Rotation	Rotation
Weight	Weight	Weight

	A
2 Division	1765
3 Division	1364
4 Division	1162
6 Division	1162
8 Division	1162
12 Division	1162
18 Division	1162
24 Division	1162

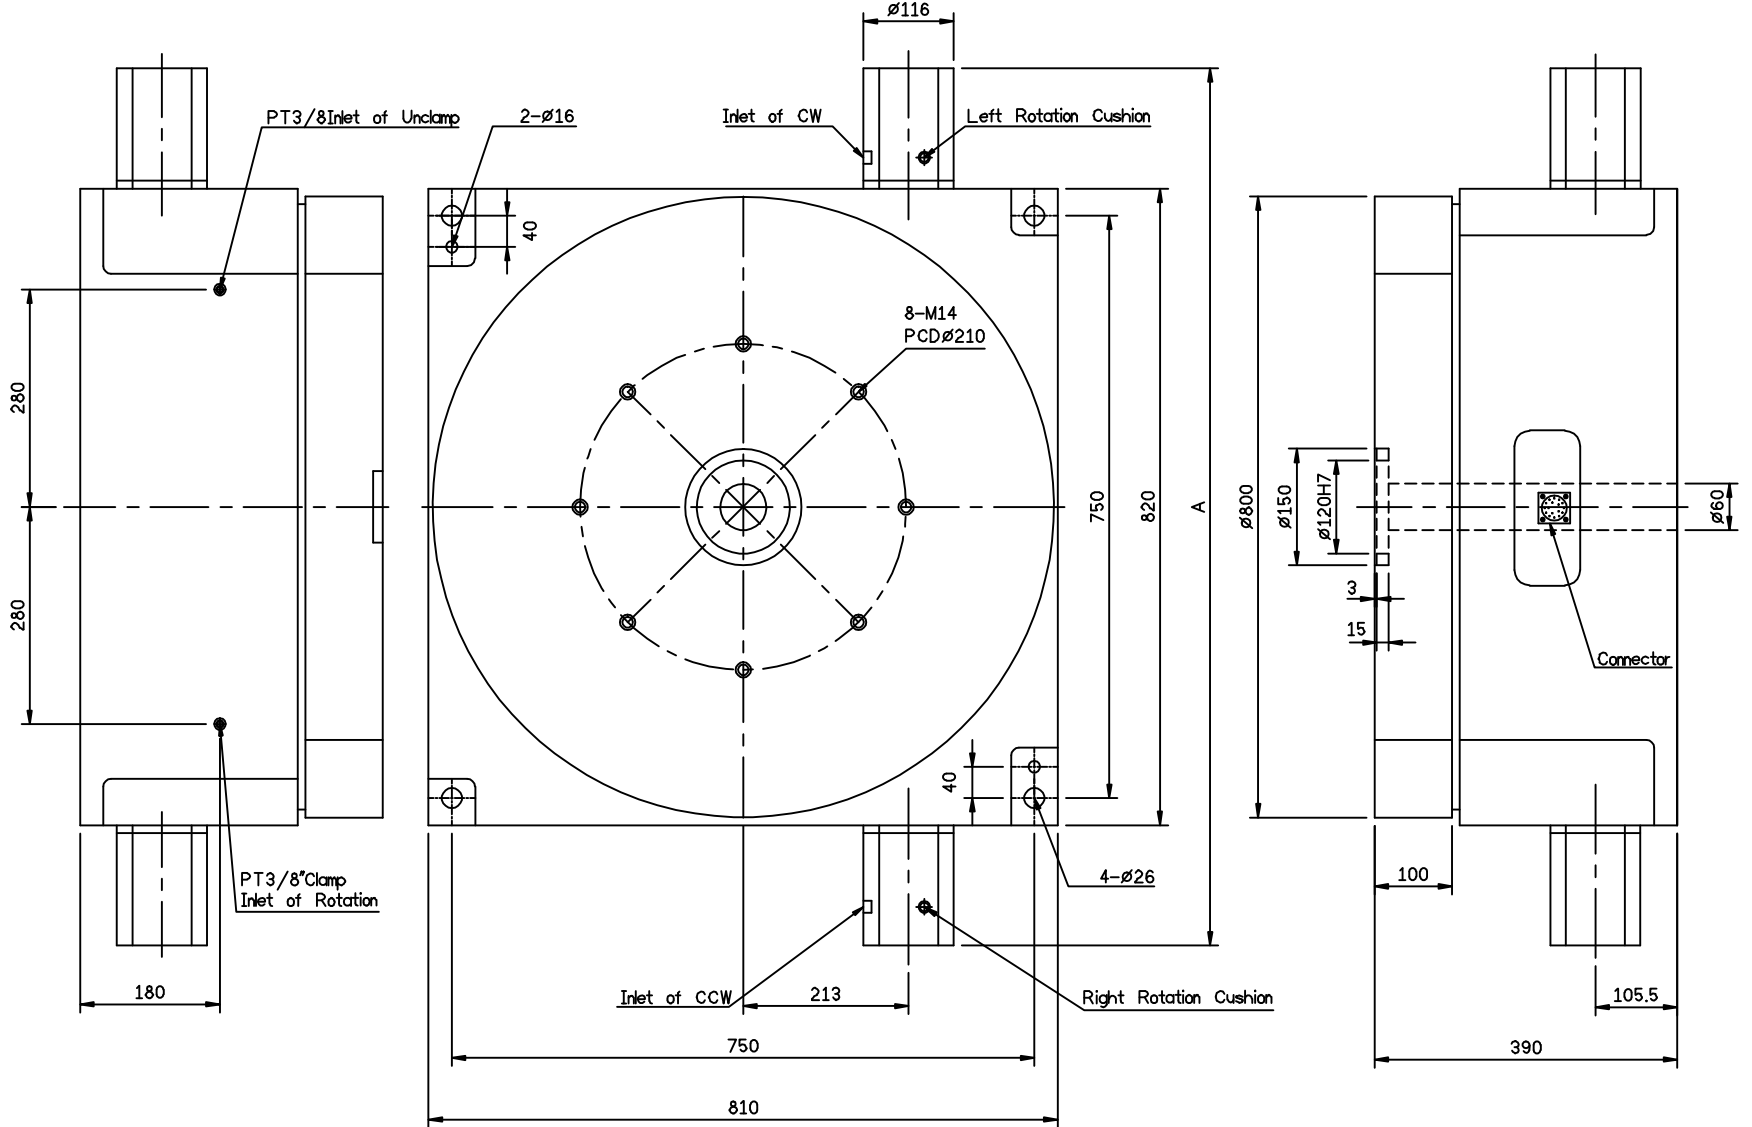

		detron		比例 SCALE	機型 MODEL	材質 MATERIAL	名稱 TITLE	圖號 DRAWING NO.
				1=7	RH800H		RH800外型圖	
		角法 SKIAGRAPHY		數量 UNIT	備註 REMARKS	標準	審圖	繪圖
▲ 00'00'00	XXXXX			1/台	退火			
ITEM DATE	ITEM DESCRIPTION							SHEET 1 OF 1 A3